


## 2306 - DUNE


2450 x 1050 mm

one-side embossed  
non repeating pattern

### Textured panel

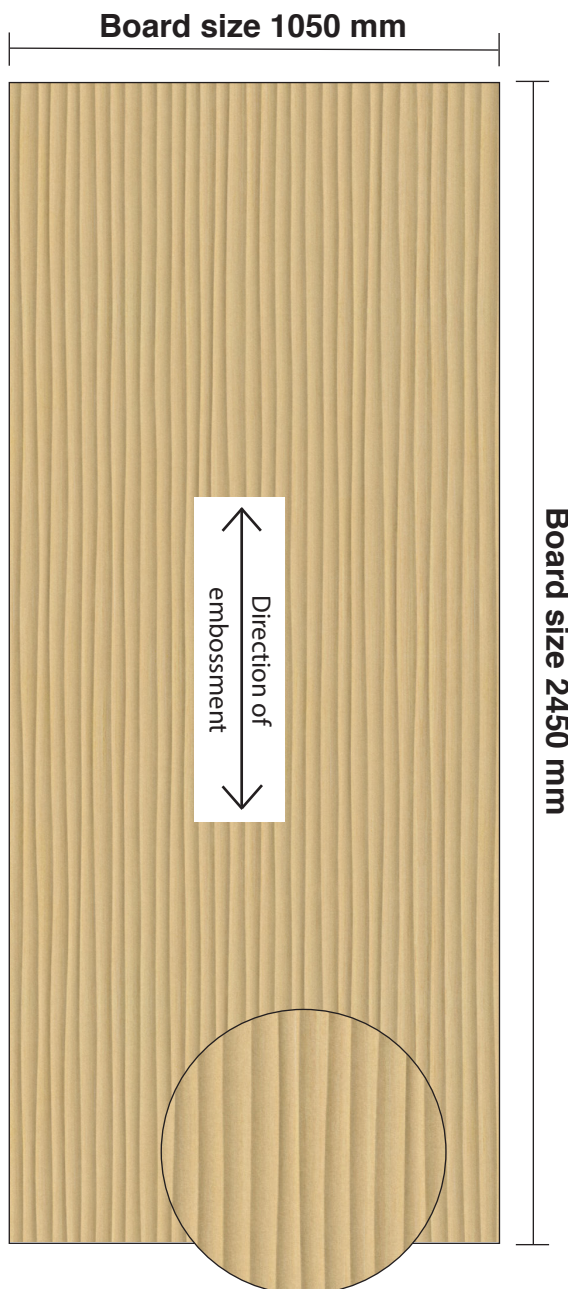

### Available thicknesses

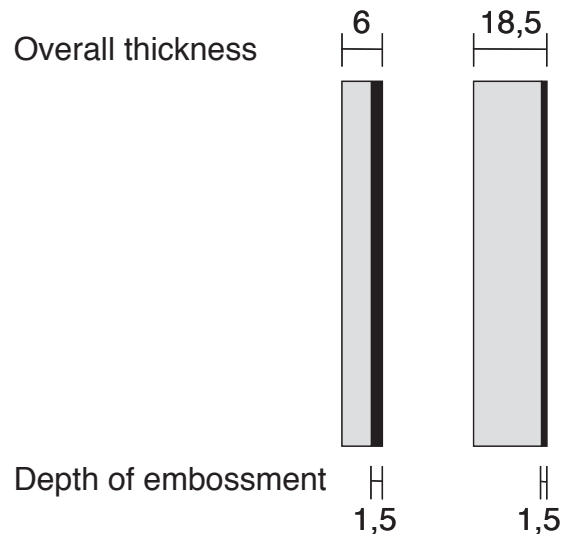

Besides the allowance of  $\pm 0,3$  mm of the total area thickness referring to the highest point there are minor differences in the thickness of the embossment - up to a maximum of 1,5 mm.

### Tolerances


Height, Width	<600mm	$\pm 0,5$ mm
	>600mm	$\pm 1,0$ mm
Thickness		$\pm 0,5$ mm
Exactitude of profile		$\pm 1,5$ mm
Straightness per meter		$\pm 3,0$ mm

## 2306 - DUNE


1050 x 2450 mm

one-side embossed  
non repeating pattern

### Textured panel

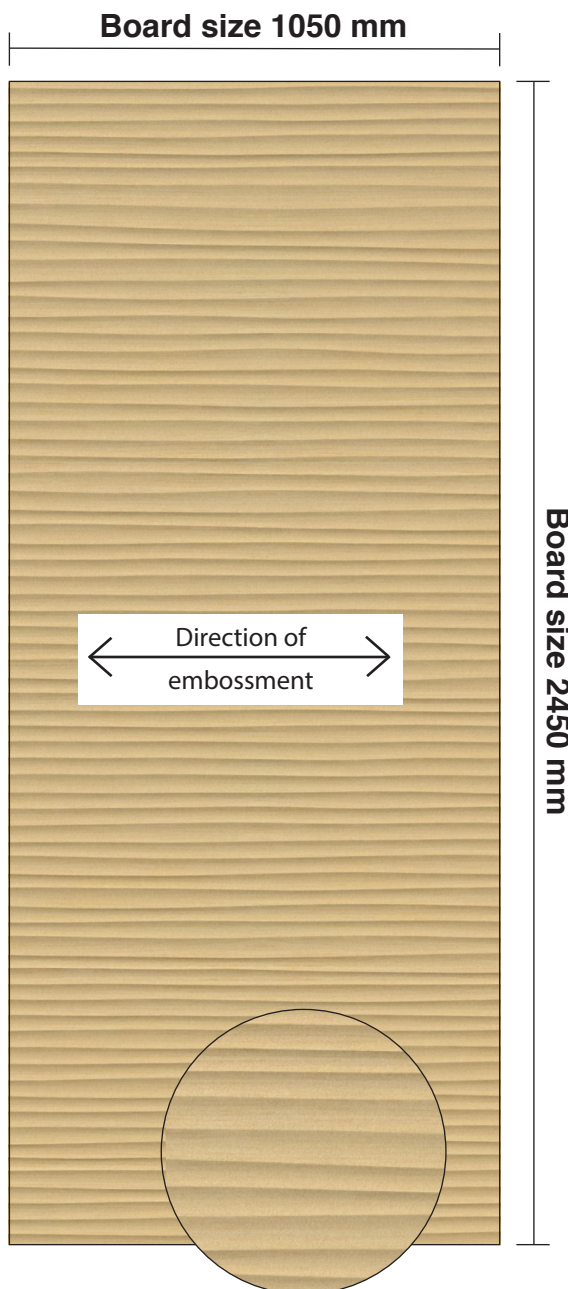

### Available thicknesses

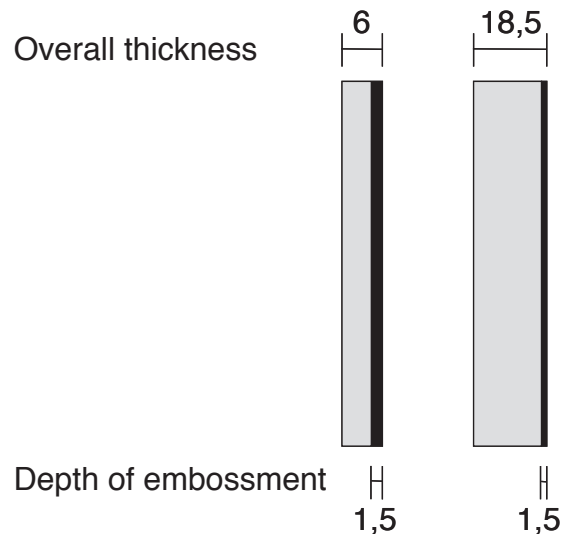

Besides the allowance of  $\pm 0,3$  mm of the total area thickness referring to the highest point there are minor differences in the thickness of the embossment - up to a maximum of 1,5 mm

### Tolerances


Height, Width	<600mm	$\pm 0,5$ mm
	>600mm	$\pm 1,0$ mm
Thickness		$\pm 0,5$ mm
Exactitude of profile		$\pm 1,5$ mm
Straightness per meter		$\pm 3,0$ mm

## 2306 - DUNE


3135 x 1270 mm

one-side embossed  
non repeating pattern

### Textured panel

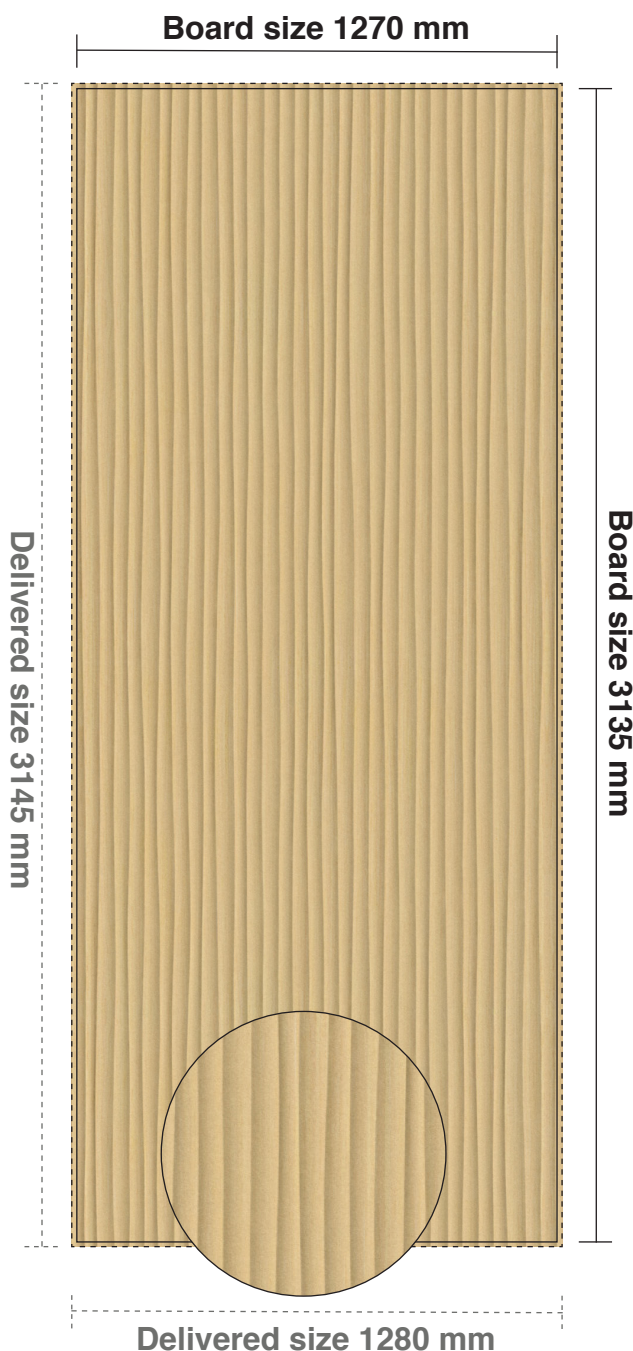

### Available thicknesses

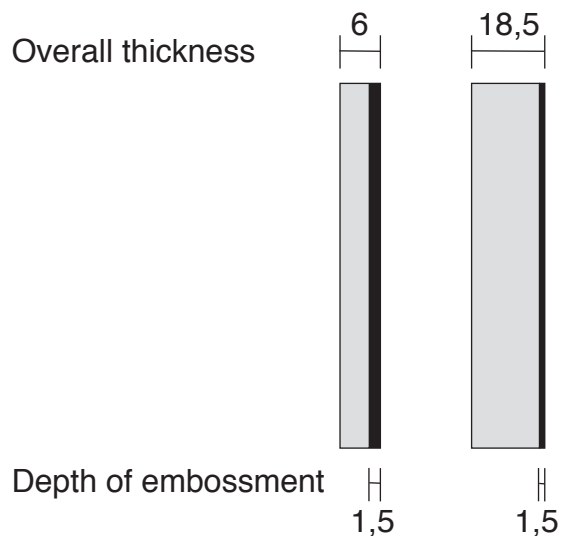

Besides the allowance of  $\pm 0,3$  mm of the total area thickness referring to the highest point there are minor differences in the thickness of the embossment - up to a maximum of 1,5 mm.

### Tolerances

Height, Width	<600mm	$\pm 0,5$ mm
	>600mm	$\pm 1,0$ mm
Thickness		$\pm 0,5$ mm
Exactitude of profile		$\pm 1,5$ mm
Straightness per meter		$\pm 3,0$ mm