


2511 - BLOCKWOOD


3135 x 1270 mm

one-side embossed
non repeating pattern

Textured panel

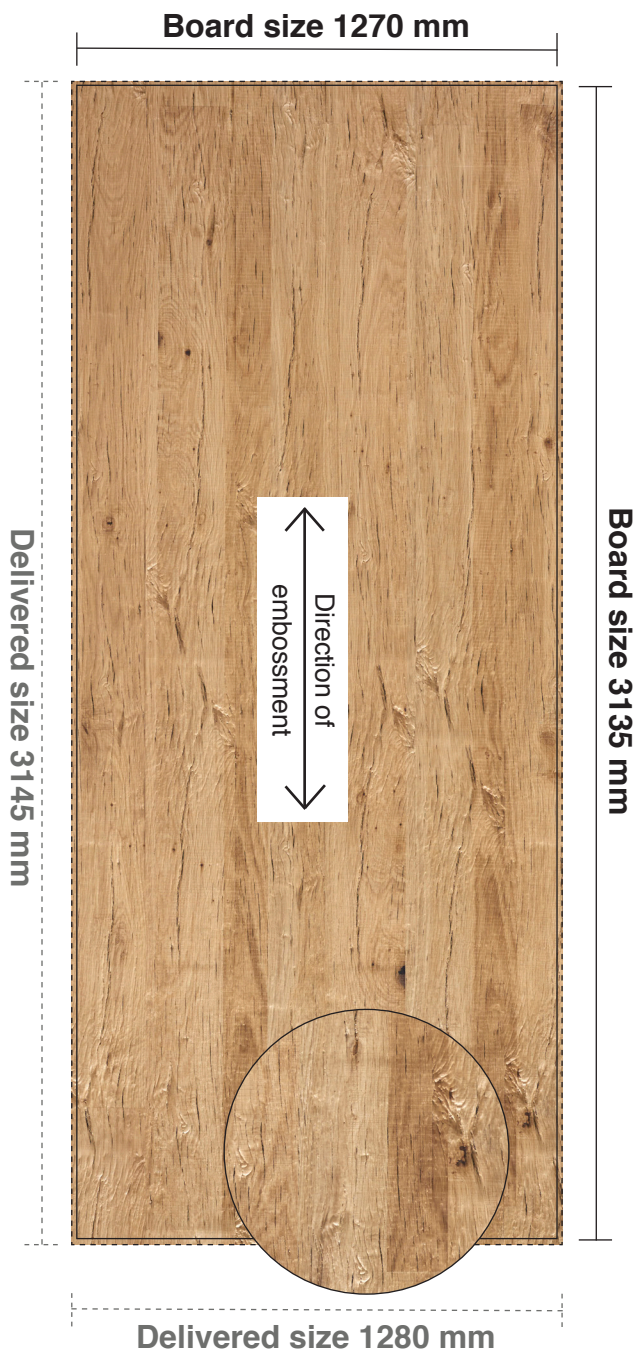

Available thicknesses

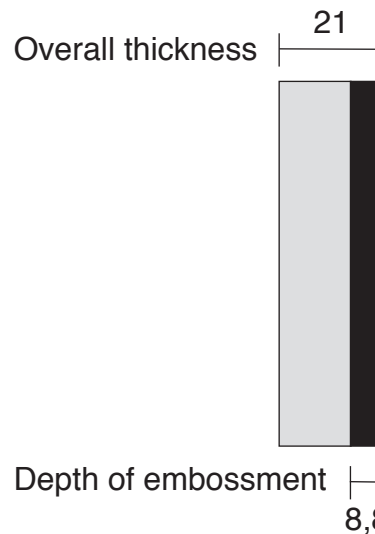

Besides the allowance of +/-0,5 mm of the total area thickness referring to the highest point there are minor differences in the thickness of the embossment - about 1,0 - 9,8 mm due to the natural design specifications.

Tolerances


Height, Width	<600mm	+/- 0,5 mm
	>600mm	+/- 1,0 mm
Thickness		+/- 0,5 mm
Exactitude of profile		+/- 1,5 mm
Straightness per meter		+/- 3,0 mm

2511 - BLOCKWOOD

1270 x 3135 mm

one-side embossed
non repeating pattern

Textured panel

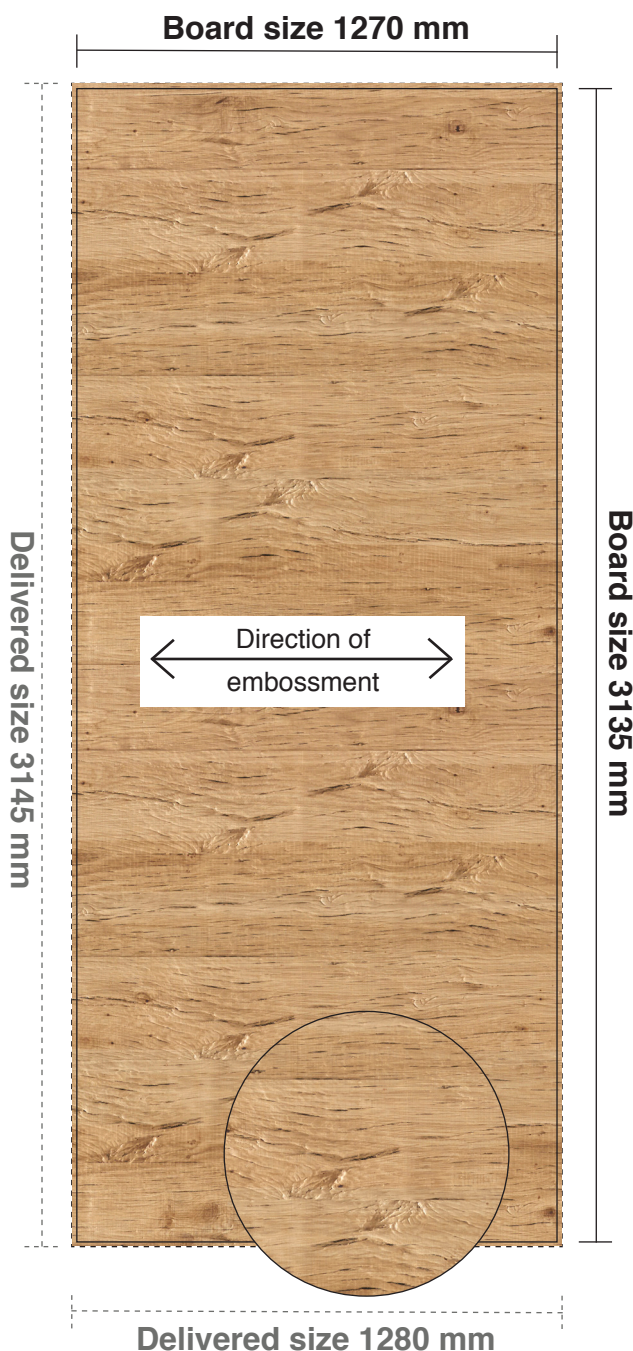

Available thicknesses



Besides the allowance of +/-0,5 mm of the total area thickness referring to the highest point there are minor differences in the thickness of the embossment - about 1,0 - 9,8 mm due to the natural design specifications.

Tolerances


Height, Width	<600mm	+/- 0,5 mm
	>600mm	+/- 1,0 mm
Thickness		+/- 0,5 mm
Exactitude of profile		+/- 1,5 mm
Straightness per meter		+/- 3,0 mm

2511 - BLOCKWOOD


2450 x 635 mm

one-side embossed
non repeating pattern

Textured panel

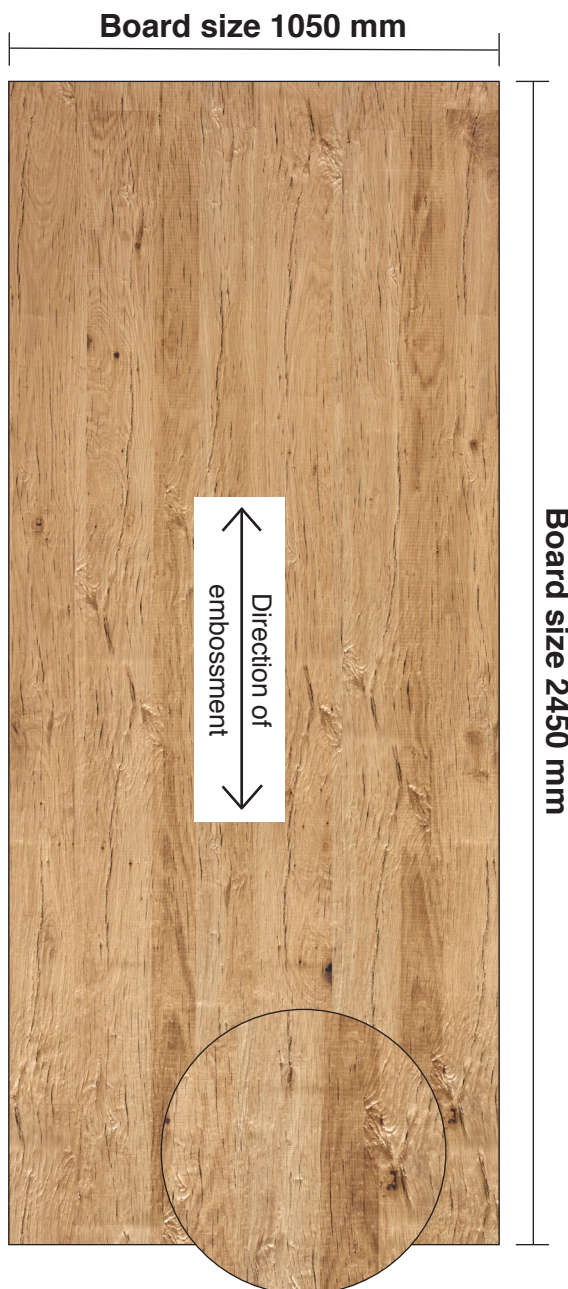

Available thicknesses

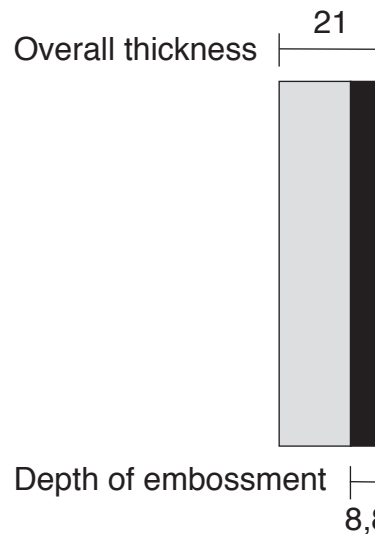

Besides the allowance of +/- 0,5 mm of the total area thickness referring to the highest point there are minor differences in the thickness of the embossment - about 1,0 - 9,8 mm due to the natural design specifications.

Tolerances

Height, Width	<600mm	+/- 0,5 mm
	>600mm	+/- 1,0 mm
Thickness		+/- 0,5 mm
Exactitude of profile		+/- 1,5 mm
Straightness per meter		+/- 3,0 mm